

JAIN SPIRAL BARB FITTING



Features & Benefits



Manufactured from high quality engineering plastic material which offers durability and reliability.



Easy to install 'Twist On' spiral barbs. 15% less force required for insertion.



Sharp barb construction allows snap free and leak proof connection.



No need of glue or clamping



Chemical resistant.



Suitable for tube having inside diameter of 12.4mm (0.487") and wall thickness of 2.5mm (0.098") to withstand maximum working pressure of 6 kg/cm² (80 psi)

JAIN SPIRAL BARB FITTING



Jain Spiral Barb Elbow

Code	Size, inch	TL,mm (inch)	L, mm, (inch)
12500544	½" NPT/BSPT	14.1 (0.56)	41.25 (1.62)
12500546	¾" NPT/BSPT	14.1 (0.56)	41.25 (1.62)



Jain Spiral Barb Coupling

Code	L, mm, (inch)
12500543	54 (2.13)
12500545	54 (2.13)




Jain Spiral Barb Threaded Coupler

Code	Size, inch	TL,mm (inch)	L, mm, (inch)
12290049	½" NPT/BSPT	14.1 (0.56)	54 (2.13)



Jain Spiral Barb Tee

Code	C,mm (inch)	L, mm, (inch)
12040084	34.9 (1.37)	69.8 (2.75)

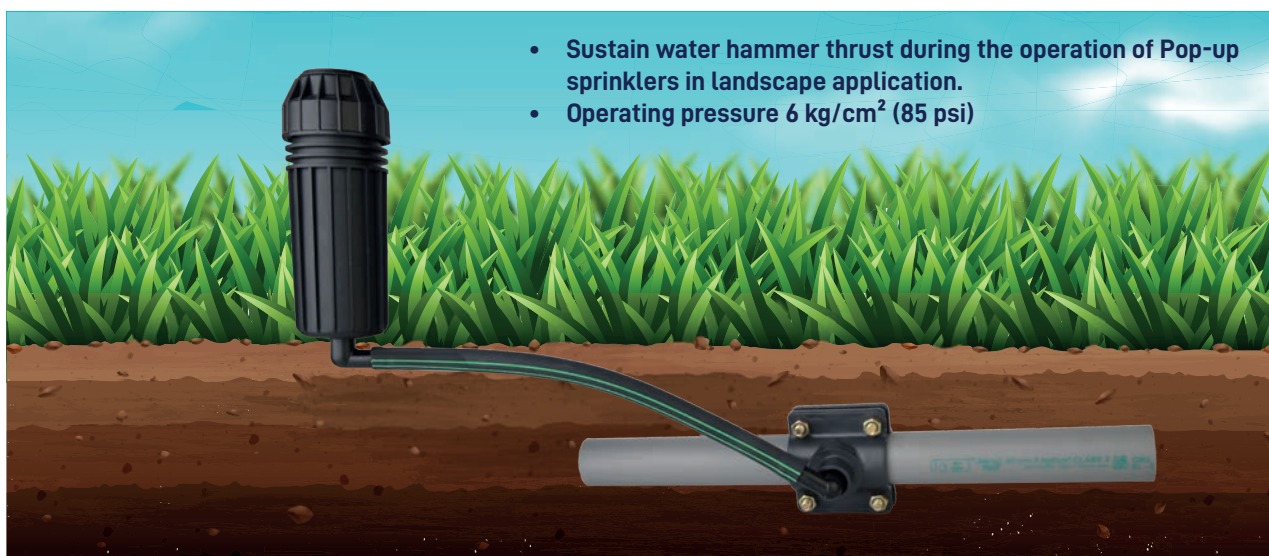

Tel: +91-257-2258011; Fax: +91-257-2258111; E-mail: jjsl@jains.com; Website: www.jains.com; Toll Free: 1800 599 5000

